

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199938013 A1

(54) Title
Bag for bone-in meat packaging

(51)⁶ International Patent Classification(s)
B65D 065/40 B65D 030/08
B32B 007/10 C08L 023/08
B65B 053/02

(21) Application No: 199938013

(22) Application Date: 1999.07.06

(30) Priority Data

(31) Number 09110455 (32) Date 1998.07.07

(33) Country
US


(43) Publication Date: 2000.06.08

(43) Publication Journal Date: 2000.06.08

(71) Applicant(s)
Viskase Corporation

(72) Inventor(s)
Paul Nick Georgelos; Paul David Tatarka

(74) Agent/Attorney
WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122



BEST AVAILABLE COPY

AUSTRALIA

Patents Act 1990




**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Application Number:

Lodged:

Invention Title: **BAG FOR BONE-IN MEAT PACKAGING**

The following statement is a full description of this invention, including the best method of performing it known to us :-

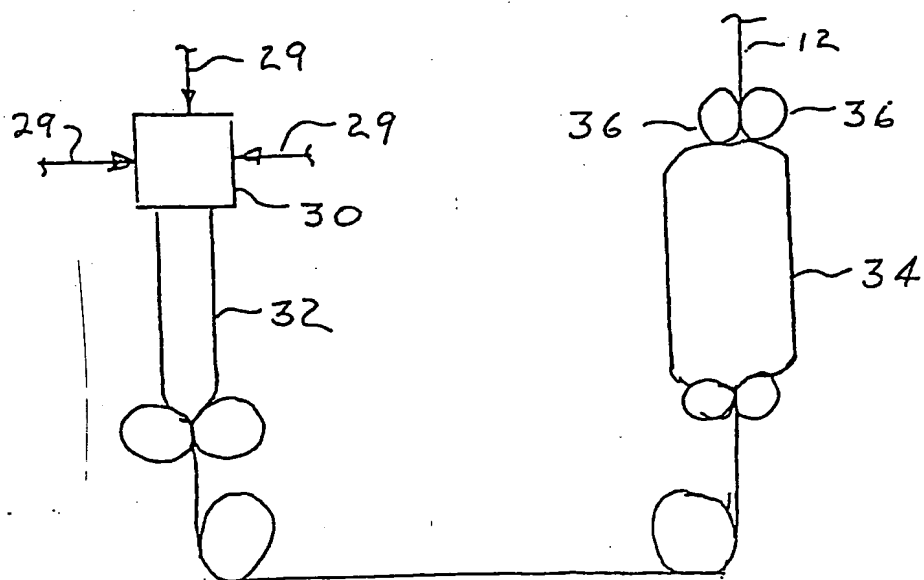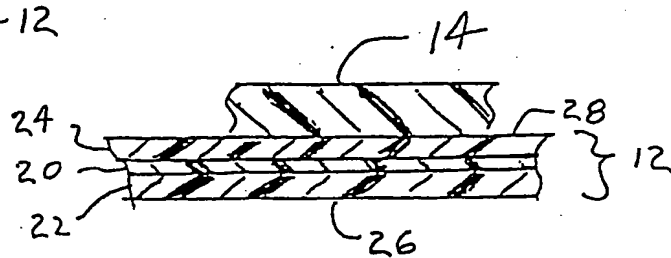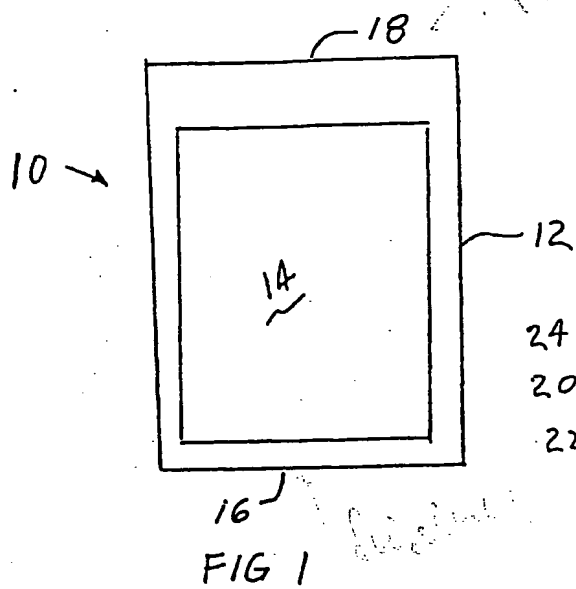

BAG FOR BONE-IN MEAT PACKAGING

5

Field of the Invention

10

The present invention relates to bags for packaging meat and, in particular, to heat-shrinkable bags having a protective patch for packaging bone-in primal cuts of meat.

Background of the Invention

15

The use of bags formed of heat-shrinkable thermoplastic film for packaging primal cuts of meat is well known in the art. In use, the primal cut is loaded into the bag. The bag is evacuated and heat sealed to form a closed package. Next the package is exposed to warm water or other heating means to cause the bag to shrink and form fit the primal cut.

20

25

30

35

The bag film is relatively thin and usually not more than about 4 mils (0.10 mm) and generally less than 3 mils (0.076 mm) thick. This thin a bag generally is not satisfactory for packaging cuts of meat which contain bone. For example, the ribs or other sharp bone protrusions as contained by primal and subprimal rib beef cuts or pork ribs, may puncture the bag during the evacuation of air from the bag or during heat shrinking as the bag draws tightly about the bone-in meat cut. A puncture in the bag is undesirable as it allows the meat in the area of the puncture to be exposed to oxygen which shortens shelf life of the packaged product. The problem of bone punctures further is compounded by abrasion between adjacent packages caused by vibration and movement of the meat packages one against another during transport and handling.

A common solution to the problem is to improve the puncture and abrasion resistance of the bag film by adhering a patch to the outer surface of the heat-shrinkable bag. U.S. Patent No. 4,755,403 discloses use of an oriented, heat-shrinkable multilayer patch which is affixed by adhesive

35

to one surface of an oriented multilayer heat-shrinkable bag. U.S. Patent No. 5,545,419 discloses adhering two patches to the bag, one to each outer surface of the flattened bag. The shrink properties of the patch in each case are matched to the shrink properties of the bag to reduce the likelihood of delamination of the patch from the bag during heat shrinking.

The shrink properties of the film from which the patch and bag are made derive from the process of orienting the patch (or bag) film. Orientation to provide heat-shrinkability at temperatures below 100°C and preferably about 90°C or less is well known in the art. Orientation also is known to improve the puncture resistance of the film. Briefly, orientation is provided by extruding a relatively thick walled tube. The tube is first cooled then reheated to soften it so that it can be expanded by inflation. Inflation provides transverse orientation. Orientation in the machine direction is provided by drawing the tube forward as it is expanded. The tube is formed into bags by heat sealing across the tube or the tube is slit lengthwise and cut to form individual biaxially oriented patches.

While orientation contributes to the puncture resistance of the film, abrasion resistance is a function of film thickness and patches on the order of 4 to 8 mils (0.10 to .20 mm) are commonly found on bags which have a wall thickness of 3 mils (0.076 mils) or less.

While a relatively thick patch film is desirable for abrasion resistance, it is known that thick films are more difficult to orient than thin films. In general, as film thickness increases above about 3 mils (0.076 mm) it becomes more difficult to orient so those properties, such as improved puncture resistance which benefit from orientation, begin to decrease. Thus, the desirable properties for a patch film of abrasion and puncture resistance represent a compromise. The compromise is to provide a film thin enough to benefit from the orientation process by having enhanced puncture resistance, yet thick enough to provide enhanced abrasion resistance.

In order to optimize the benefits of puncture resistance through orientation and abrasion resistance by increasing film thickness, multilayer patch materials are used in the prior art. U.S. Patent Nos. 4,755,403 and 5,545,419 disclose a heat-shrinkable irradiated patch material formed by collapsing an oriented multilayer tube. The tube wall has an inner surface formed of a self-adhering layer of ethylene vinyl acetate (EVA) and an outer surface formed of a polyethylene-EVA blend, the polyethylene being linear low density polyethylene (LLDPE) such as DOWLEX 2045 from the Dow Chemical Company. When the oriented tube is collapsed, the inner surfaces of the tube adhere together and in effect form a three layer patch having the general structure EVA+LLDPE/EVA/EVA+LLDPE.. The irradiation dosage is about 7 MR. In a commercial version the irradiated patch is about 5 mils (0.127 mm) thick and is adhered to a multilayer bag having a wall thickness of about 2.3 mils (0.058 mm). Accordingly, in this commercial version the multilayer patch is over twice the thickness of the bag film.

U.S. Patent No. 5,302,402 discloses a monolayer patch formed of a blown film. The film is not oriented so it is not heat shrinkable. The patch film is composed of a blend of EVA and very low density polyethylene (VLDPE) such as a Dow type XU 61520.01 which has a density of about 0.912 g/cc. As disclosed in this patent, the nonoriented patch of about 5 mils (0.127 mm) to 7 mils (0.178 mm) is applied to the surface of a three layered bag having a wall thickness as thin as 2.25 mils (0.57 mm). The outer surface of the bag is composed of a polymer blend including EVA and the sole bonding means between the nonshrinkable patch and the shrinkable bag is a high surface energy of at least 38 dynes/cm wetting tension. The high surface energy is provided by corona treatment. Prior to heat shrinking, the high surface energy allows the patch to cling to the bag in that it is still possible to peel the patch from the bag. After heat shrinking, however, it was found that the bond between the nonshrunk patch and the

shrunk bag increased such that a bond was created sufficient to prevent delamination of the patch from the bag. The abrasion resistance of the bag as measured by simulated and actual shipping tests was comparable to commercial bags having heat-shrinkable patches. Thus, the bag as described in the '402 Patent provided abrasion resistance using a relatively thick 5 to 7 mil (0.127 to 0.178 mm) nonoriented monolayer patch and was said to eliminate the need to biaxially orient and irradiate the patch film.

Since the patch was not oriented, it could be made thicker to improve abrasion resistance. Thus, while the bag as disclosed in the '402 Patent exhibited certain advantages, the lack of orientation of the patch film compromises puncture resistance and the patch generally was thicker than an oriented patch.

Accordingly, an object of the present invention is to provide an improved patch bag for packaging bone-in primal and subprimal cuts of meat.

Another object is an improved patch bag having abrasion resistance and enhanced puncture resistance.

A further object is an improved patch bag which provides abrasion resistance and has enhanced puncture resistance while utilizing a relatively thin patch.

Yet another object is an improved patch bag wherein abrasion resistance and enhanced puncture resistance are achieved using a relatively thin monolayer patch.

Summary of the Invention

In one aspect, the present invention relates to a patch bag for packaging bone-in meat cuts and especially bone-in primal and subprimal meat cuts such as beef ribs or pork loins and the like. The patch bag

comprises a relatively thin walled bag formed of a biaxially oriented multilayered thermoplastic film and a relatively thin patch adhered to an outer surface of the bag, the patch being formed of a biaxially oriented monolayer film.

5 The bag preferably is formed of a multilayer barrier film wherein an oxygen barrier layer is disposed between a heat-sealable layer which defines the inner surface of the bag, and an abuse layer which defines the outer surface of the bag.

10 The film comprising the bag structure is biaxially oriented and has a total thickness of between 2.25 mils (0.057 mm) and 3.5 mils (0.089 mm). The patch adhered to the outer surface of the bag is a monolayer biaxially oriented film substantially less than 5 mils (0.127 mm) thick and preferably no more than about 3.5 mils (0.089 mm). Accordingly, the bag film and patch film are about equal in thickness so a feature of the present invention is that the patch is relatively thin and not substantially thicker than the thickness of the bag. Further, the patch according to the present invention provides abrasion resistance and enhanced puncture resistance together with the economy of reducing the patch thickness by 40% or more of the thickness of conventional patches.

15 20 The patch bag of the present invention in a further aspect is characterized by the oriented patch being adhered to the outer surface of the oriented bag film without adhesive. In this respect, one surface of the patch and an outer bag surface are both corona treated to raise the surface energy such that the patch will cling to the bag. This cling is sufficient to maintain the patch in position through the packaging process. Thereafter, upon heat shrinking a still greater adhesion occurs between the oriented patch and bag to the extent that delamination of the patch from the bag during handling and transport of the packaged meat does not occur. The adhesion of an unoriented patch to the bag using corona treatment to cause the adhesion is

known from U.S. Patent No. 5,302,402. However, accomplishing the adhesion using an oriented patch was unexpected in that it was not known whether corona treatment of an oriented film surface would have the desired effect. Not only was the adhesion unexpected, the adherence of the oriented patch according to the present invention proved to be even greater than that of the prior art unoriented patch. Further, adhesion was accomplished even without the surface roughness which was found to be essential for adhering an unoriented patch to an oriented film. Surface roughness can result from melt fracture during extrusion of the film. In the case of an unoriented blown film patch, it was found that films which exhibited little or no melt fracture exhibited poor adherence after corona discharge. In the case of the oriented patch according to the present invention, the absence of melt fracture is no deterrent to adhesion. This means a clear patch film can be made since melt fracture detracts from film clarity.

In one embodiment, the present invention is characterized by the formulation of the monolayer patch being a blend of primarily four components including an EVA and three different ethylene α -olefin copolymers. A first of the ethylene α -olefin copolymers preferably has a melting point of between 55 to 90°C, the second has a melting point of between 90 to 110°C and the third has a melting point of between 115 to 130°C. These same four components make up the heat seal layer of the bag film. Accordingly, in one embodiment of the patch bag of the present invention, the heat seal layer of the bag film and the patch film are substantially the same formulation.

In an alternative and preferred embodiment, the bag film is the same but the EVA is omitted from the patch film.

Description of the Drawings

Figure 1 illustrates a patch bag according to the present invention;

Figure 2 is a cross sectional view of a portion of the patch bag wall; and

Figure 3 is a schematic view illustrating steps of the film orientation process.

Detailed Description of the Invention

Referring to the drawings, Figure 1 shows the patch bag of the present invention generally indicated at 10. The patch bag comprises a bag portion 12 and a patch 14 adhered to an outer surface of the bag. The bag preferably is formed by collapsing a tubular film to its flat width and then heat sealing across the flat width to form the closed bottom 16 of the bag. The top 18 is opened.

The patch 14 generally is smaller in area than the bag as shown but it also can have a width equal to or greater than the bag width so that a maximum surface area of the bag is covered. While the patch is shown applied to only one side of the bag, patches can be applied to both sides as shown, for example, in U.S. Patent No. 5,545,419.

Both the bag portion and patch are formed of a biaxially oriented heat-shrinkable thermoplastic film. The bag film is a multilayer film and the patch film is a monolayer film.

As used herein, "biaxially oriented" and "heat-shrinkable" mean that the bag and patch films each have an unrestrained shrinkage of at least 10% in each of the transverse direction (TD) and machine direction (MD) measured at 90°C (194°F). Preferably they have an unrestrained shrinkage of at least 20% in each direction and most preferably the shrink is at least 40% or more in both directions.

Measuring the unrestrained shrink value of a thermoplastic film is accomplished by a procedure derived from ASTM D2732. In this procedure, four test specimens are cut from a given sample of the film to be tested. The specimens are cut to 10 cm in the machine direction by 10 cm in the transverse direction. Each specimen is completely immersed for 5 seconds in a 90°C water bath. After removal from the water bath, the distance between the ends of the specimen is measured. The difference in the measured distance for the shrunken specimen and the original 10 cm is multiplied by ten to obtain the percent of shrinkage for the specimen. The shrinkage for the four specimens is averaged for the MD shrinkage values of the given film sample, and the shrinkage for the four specimens is averaged for the TD shrinkage value.

As shown in Figure 2, the film which forms the bag portion 12 preferably is a multilayer film including a barrier layer 20 disposed between an inner heat sealing layer 22 and an outer abuse layer 24. The inner layer 22 defines the inner surface 26 of the bag and abuse layer 24 defines the outer surface 28 of the bag. The patch 14 as shown in Figure 2 is a monolayer film adhered to the bag outer surface 28

The terms "barrier" or "barrier layer" as used herein means a layer of a multilayer film which acts as a physical barrier to gaseous oxygen molecules. Physically, a barrier layer material will reduce the oxygen permeability of a film (used to form the bag) to less than 70 cc per square meter in 24 hours at one atmosphere at a temperature of 73°F (23°C) and 0% relative humidity. These values should be measured in accordance with ASTM standard D-1434.

Barrier layer 20 is formed of any suitable oxygen barrier material or blend of material, for example, ethylene-vinyl alcohol copolymer (EVOH) or vinylidene chloride copolymers (VDC) such as VDC-vinyl chloride (VDC-VC) or VDC-methylacrylate (VDC-MA). For purposes of the present

invention, a preferred barrier layer comprises a blend of VDC-VC and VDC-MA and, in particular, a blend of 85 wt.% VDC-MA and 15 wt.% VDC-VC.

As noted above, the bag film 12 is generally 2.25 to 3.5 mils (0.057 to 0.089 mm) and preferably no more than 3 mils thick. In this structure, the abuse layer 24 would be 0.68 to 0.9 mils (0.017 to 0.0228 mm) thick, the barrier layer 20 would be 0.225 to 0.3 mils (0.006 to 0.008 mm) thick and the seal layer 22 would be 1.35 to 1.8 mils (0.034 to 0.046 mm) thick.

In one embodiment of the present invention, substantially the same blend of polymers form both the heat seal layer 22 of the multilayer bag film 12 and the patch film 14. In this embodiment, the heat seal layer and the patch film is a four polymer blend.

The first ethylene alpha olefin polymer of the blend has a melting point between 55 to 90°C, and comprises an ethylene alpha olefin copolymer. Examples of suitable first polymers include copolymers of ethylene with at least one C₃-C₁₀ alpha-olefin, such as C₂/C₄ and C₂/C₆, C₂/C₈ copolymers e.g., ethylene butene-1 copolymer, ethylene hexene-1 copolymer and ethylene octene-1 copolymer. Exemplary suitable first polymers may have a density of 0.900 g/cm³ or less, a melt index of about 1.5 dg/min. or less, and an $\overline{M}_w/\overline{M}_n$ of less than 3, preferably about 2. Preferred commercially available first copolymers include those sold under the trademark TAFMER A-0585 and EXACT 9036. TAFMER is a trademark of Mitsui Petrochemical Co., Tokyo, Japan. EXACT is a trademark of EXXON Chemical Co., Houston, Texas, U.S.A. for their ethylene alpha-olefin polymers produced using metallocene single-site catalysts. These resins typically have a low level of crystallinity, 10 to 15% is typical. It is preferred that the first polymer of the heat sealing layer comprise a copolymer of ethylene having a melt index (M.I.) between about 0.2 and 2 (more preferably 0.2 to 0.7) dg/min. as measured by ASTM D-1238, at 190°C under

a total load of 2.16 Kg (condition E). Polymers of the type suitable for use as the first polymer and having the properties as described are sometimes referred to herein as "Plastomers". The term mPlastomers as used herein refers specifically to a Plastomer made using a metallocene catalyst system.

5 The second ethylene alpha olefin polymer of the blend has a melting point of from 90 to 100°C, and comprises a copolymer of ethylene and at least one alpha olefin. Examples of suitable second copolymers include copolymers of ethylene and at least one C₃ to C₁₀ alpha olefin, such as C₂ / C₄, C₂ / C₆, C₂ / C₈ and C₂ C₄ / C₆ copolymers, e.g., ethylene butene-1
10 copolymer, ethylene hexene-1 copolymer, ethylene octene-1 copolymer, and ethylene butene-1 hexene-1 copolymer. The latter copolymer is an example of a suitable terpolymer. Exemplary suitable second polymers may have a density of at least about 0.900 g/cm³ and higher, preferably from 0.900 to 0.915 g/cm³; a melt index preferably of 2 dg/min. or less, more preferably about 0.8 -1.2 dg/min.; and a \bar{M}_w/\bar{M}_n of preferably less than 3.5. In one
15 embodiment of the invention a preferred second polymer has a \bar{M}_w/\bar{M}_n of about 2. Preferred second copolymers include AFFINITY PL 1840, AFFINITY PL 1880, and EXACT 3032. AFFINITY is a trademark of Dow
20 Chemical Co. of Midland, Michigan, U.S.A. for its ethylene polymers produced using metallocene constrained geometry catalysts. EXACT is a trademark of Exxon Chemical Co. of Houston, Texas, U.S.A. for their metallocene single site catalyst produced polymers. It is preferred that the
25 second polymer of the abuse layer comprise a copolymer of ethylene having a melt index (M.I.) between about 0.5 and 2.5 (more preferably 0.7 to 1.5) dg/min. as measured by ASTM D-1238, at 190°C under a total load of 2.16 Kg (condition E).

 The third polymer of the blend has a melting point of from 115 to 130°C and comprises a thermoplastic polymer, preferably a copolymer of ethylene and at least one alpha olefin. Examples of suitable third polymers

include copolymers of ethylene and at least one C_3 to C_{10} alpha olefin, such as C_2 / C_4 , C_2 / C_6 , C_2 / C_8 and $C_2 / C_4 / C_6$ copolymers, e.g. ethylene butene-1 copolymer, ethylene hexene-1 copolymer. Exemplary suitable third polymers may have a density of at least about 0.900 g/cm^3 and higher, preferably from 0.900 to 0.915 g/cm^3 ; a melt index of 2 dg/min. or less, preferably 1.0 dg/min. or less; and a \bar{M}_w / \bar{M}_n of from about 2 to 12 or more, preferably greater than 3.5. Preferred third copolymers include ATTANE XU 61509.32. ATTANE is a trademark of Dow Chemical Co. of Midland, Michigan, USA. It is preferred that the third polymer of the heat sealing layer comprise a polymer of ethylene having a melt index (M.I.) between about 0.2 and 2 (more preferably 0.2 to 0.7) dg/min. as measured by ASTM D-1238, at 190°C under a total load of 2.16 Kg (condition E).

The second and third polymers are sometimes each referred to herein as a very low density polyethylene or VLDPE wherein the second polymer, to distinguish it as being a constrained geometry catalyzed or metallocene catalyzed polymer is referred to herein as mVLDPE.

The fourth polymer of the heat seal layer blend, and which is optional in the patch has a melting point of from 80 to 105°C , preferably 90 to 100°C . Suitable fourth polymers that may be employed include copolymers of ethylene and unsaturated esters having adhesive and/or heat sealing properties. Such copolymers are predominantly ($>50 \text{ wt.}\%$) ethylene. Suitable copolymers include ethylene vinyl esters and ethylene alkyl acrylates such as ethylene-vinyl acetate, ethylene-vinyl propionate, ethylene-methyl methacrylate, ethylene-ethyl methacrylate, ethylene-ethyl acrylate, and ethylene n-butyl acrylate. Preferred copolymers are ethylene-vinyl esters such as ethylene-vinyl acetate, ethylene-vinyl formate, ethylene-vinyl propionate, and ethylene-vinyl butylate. Especially preferred is ethylene-vinyl acetate copolymer (EVA). Many different EVA resins are commercially available having a wide range of vinyl acetate contents and melt flow indices.

Suitable vinyl ester or alkyl acrylate content of the preferred fourth polymer components used in the present invention include 4 to 28 (preferably 4 to 18) wt.% vinyl ester or alkyl acrylate based on the total third polymer weight.

5 For the embodiment of the present invention where the film heat seal layer and the patch film have the same formulation, it is preferred that the fourth polymer of the abuse layer and patch comprise a copolymer of ethylene and a vinyl ester having a melt index (M.I.) between about 0.1 and 2 (more preferably 0.1 to 0.5) dg/min. as measured by ASTM D-1238, at
10 190°C under a total load of 2.16 Kg (condition E).

A most preferred EVA copolymer is that sold by the Exxon Chemical Company of Houston, Texas under the brand designation ESCORENE LD 701.06 with the following reported properties, a density of 0.93 g/cm³, a vinyl acetate content of 10.5 wt.%, and a melt index of about
15 0.19 dg/min., and a melting point of about 97°C.

In this first embodiment, the blend of polymers for the heat seal layer of the bag film and for the monolayer patch, which are substantially the same blend, will comprise about 20 to 30 wt% of the first polymer (Plastomer), from about 30 to 40 wt% of the second polymer (mVLDPE), from about 15 to 25 wt% of the third polymer (VLDPE) and 15 to 25 wt% of the fourth polymer (EVA). A preferred blend of polymers for the heat seal layer of the bag film includes a conventional slip aid and a stabilizer whereas the blend for the monolayer patch comprises substantially the same components but without the stabilizer. Thus, in one embodiment of the present invention, the monolayer patch film although thicker than the bag film heat seal layer 22, comprises substantially the same four component polymer blend of Plastomer, mVLDPE, VLDPE and EVA as the heat seal layer of the bag film.

The abuse layer of the bag film is generally a three component blend similar to the heat seal layer only omitting the third polymer (VLDPE). A suitable blend for the abuse layer is 20 to 30 wt% of the first polymer (Plastomer), 40 to 50 wt% of the second polymer (mVLDPE) and 20 to 30 wt% of the fourth polymer (EVA).

In other embodiments of the invention the bag film will be substantially the same as set out above but the patch film will omit the fourth polymer (EVA). In this respect a second embodiment to the patch film will be substantially a three component blend of 20 to 60 wt.% of the first polymer (Plastomer), 20 to 60 wt.% of the second polymer (mVLDPE) and 15 to 25 wt.% of the third polymer (VLDPE) together with a minor amount of a processing aid to reduce melt fracture.

For example a preferred patch film formulation of the second embodiment comprises:

- 26 wt% of the first polymer (Plastomer),
- 50 wt% of the second polymer (mVLDPE)
- 21 wt% of the third polymer (VLDPE) and
- 4 wt% of a processing aid.

A preferred first polymer for this embodiment is a C_2/C_6 copolymer such as an EXACT 9092 hexene mPlastomer which has a density of 0.895 g/cm³, a melt index of 0.8 dg/min and a melting temperature of 85.2°C. A preferred second polymer (mVLDPE) is the Dow AFFINITY PL1880 and a preferred third polymer (VLDPE) is the Dow ATTANE XU 61509.32.

If melt fracture is not an issue, the processing aid may be omitted. In this case a suitable blend is generally the following formula:

- 50 wt% second polymer - Dow AFFINITY PL 1880
- 30 wt% first polymer - Exxon EXACT 9092 and
- 20 wt% third polymer - Dow ATTANE XU 61509.32.

It should be noted that the above reported melt indices for the various resins employed as the first, second, third and fourth polymers are initial melt index values for the pelletized resins as received by the manufacturer. Such "as received" pellet values are intended when the term melt index is used herein unless otherwise noted. Crosslinking, especially irradiative crosslinking, is known to increase the average molecular weight by formation of longer chains of molecules than originally present. Therefore, crosslinking will also reduce the melt index of a polymer from its initial value to a lower value since the melt index is not only a measure of viscosity but also an indirect measure of molecular weight. Also, the melt blended material will also have its own melt index which is not to be confused with that of the original copolymer components of the blend. The industry custom is that the term "melt index" refers to the resin (usually pelletized or powdered) as received from the polymer manufacturer unless otherwise specified. Also, when an interpolymer is used, the interpolymer resin may have two or more melting points which satisfy the different melting points required by the present invention.

Both the film of the bag portion 12 and film of the patch 14 are made using a conventional double bubble process to form biaxially oriented heat-shrinkable films as disclosed, for example, in Pahlke U.S. Patent No. 3,456,044. Briefly, in the double bubble (sometimes called a trapped bubble process) as shown in Figure 3, the polymers are extruded from an annular die 30 as a relatively thick walled tube 32. In the case of the bag film the polymer blends making up the several layers are coextruded by conveying separate melt streams 29 to the die. These melt streams are combined in the die and extruded as a multilayer structure. In any event, the thick walled tube 32 or "primary" leaving the extrusion die is cooled and collapsed. It then is reheated to below its melting point and inflated with air to form the secondary bubble 34. The inflation which diametrically expands the film

provides transverse or TD orientation. Orientation in the machine direction (MD) is accomplished by adjusting the speed of nip rollers 36 to pull or draw the film in the machine direction.

In the case of the multilayer bag film, the biaxial orientation preferably is sufficient to provide a multilayer film with a total thickness of between 2.25 and 3.5 mils (0.064 to 0.089 mm). The MD stretch ratio typically is 3 to 5 and the TD stretch ratio typically also is 3 to 5.

For the monolayer patch film, the biaxial orientation is sufficient to provide a monolayer film having a total thickness of between 2.5 and 3.5 mils (0.064 to 0.089 mm) and is generally in the same stretch ratio range as the bag film, namely about 3 to 5 for both the MD and TD.

After orientation, the tubular patch film is slit longitudinally and laid flat. The bag film is collapsed to its flat width without slitting. One flattened surface of the bag film (the patch receiving surface 28) and one surface of the patch film is each separately exposed to high energy to increase the surface tension of these films. This, for example, preferably is accomplished by corona discharge although other methods may be used such as flame, plasma or ultraviolet treatment among others. The treatment should increase the surface tension of each treated surface, as measured by wetting tension, to at least about 38 dynes/cm and preferably to about 44 to 46 dynes/cm. The patch film may have a higher surface tension.

After the surface energy of the bag and patch film has been raised, the patch film is cut into individual patches which are laid at spaced intervals along the flattened bag film. Next, individual bags are made by forming a heat seal across the flattened bag film and then severing the bag film to form the individual bags as shown in Figure 1. The method and apparatus for applying the patch film and making individual bags form no part of the present invention. A suitable method and apparatus for applying the

patch and making bags is described in U.S. Patent No. 5,302,402, the disclosure of which is incorporated herein by reference.

Several tests were conducted to demonstrate the superior puncture resistance of the patch bags of the present invention.

5 A multilayer bag film was made and tested. In particular, the bag film was a three layer barrier film. The inner or heat seal layer was formulated of a blend of:

10 a) 24 wt.% of the first polymer, and specifically Mitsui Petrochemical Industries TAFMER® A0585x which is a C₂ - C₄ copolymer having a density of 0.885 g/cm³, a melt index (MI) of 0.5 dg/mm, a melting point (MP) of 68°C, which for purposes of this invention is referred to as Plastomer;

15 b) 29.1 wt.% of the second polymer and specifically a Dow Chemical Company AFFINITY® PL1880 which is an ethylene-octene copolymer having a density of about 0.902 g/cm³, an MI of about 1.0 dg/min. and an MP of about 100°C. Dow's AFFINITY resins are made using constrained geometry catalysts which, for purposes of this invention, is referred to as metallocene very low density polyethylene (mVLDPE);

20 c) 19.2 wt.% of the third polymer and specifically Dow's ATTANE® XU 61509.32 which is an ethylene-octene copolymer having a density of about 0.912 g/cm³, an MI of about 0.5 dg/min., an MP of about 122°C and a Vicat Softening Point of 95°C which, for purposes of the present invention, is referred to as VLDPE.

25 d) 19.3 wt.% of the fourth polymer and specifically an Exxon Chemical Company LD 701.06 EVA having a vinyl acetate content of 10.5%, a density of 0.93 g/cm, an MI of 0.19 dg/min. and an MP of about 97°C.

The remainder of the blend comprised 4.4 wt.% of conventional slip processing aids and 4 wt.% of a stabilizer.

The film core or barrier layer was a blend of 85 wt.% vinylidene chloride-methacrylate (VDC-MA) copolymer and 15 wt.% vinylidene chloride-vinyl chloride (VDC-VC) copolymer.

The outer abuse layer of the film was formulated of a blend of:

- 5 a) 24.3 wt.% of the first polymer (Plastomer) specifically a Mitsui Tafmer A 0585X;
- b) 47 wt.% of the second polymer (mVLDPE) specifically a Dow AFFINITY PL 1880; and
- 10 c) 24.3 wt.% of the fourth polymer (EVA) specifically an Exxon LD 701.06.

The remainder of the abuse layer blend comprised slip processing aids.

The formulations of the three layers were coextruded through an annular die to form a primary tube.

15 The tube was cooled, flattened, reheated, inflated to form a bubble to biaxially stretch the tube and the bubble cooled. The MD draw and TD inflation during biaxial orientation were 4.8:1 to 4.9:1 and 4.6:1 to 4.7:1 respectively. The temperature on reheating for orientation is believed to be about 80°C. The resulting film had an average gauge of about 2.5 mils (0.063 mm), wherein the thickness of the heat seal, barrier and abuse layers were 0.75mils (0.178 mm), 0.25 mils (0.064 mm) and 1.5 mils (0.038 mm) respectively.

20 The orientation temperature, bubble cooling rates and orientation ratios are generally adjusted as known in the art to maximize bubble stability wherein the use of higher throughput rates and lower bubble temperatures are believed to provide films having higher puncture resistance relative to the use of lower throughput or higher orientation temperatures.

25 After orientation, the film was irradiated by electron beam according to methods well known in the art to a level of about 5.3 Mrad. This bag film is Sample 1.

30

A first EVA containing monolayer patch film was made in a similar fashion. The patch film formulation was nearly identical to the formulation of the heat seal layer of the bag film, namely:

35 wt.% mVLDPE (Dow AFFINITY PL 1880)

24 wt.% Plastomer (Mitsui Tafmer A 0585X)

20 wt.% VLDPE (Dow XU 61509.32)

19 wt.% EVA (Exxon LD 701.06)

2 wt.% processing aid.

Extrusion of this formulation was through a 110 mm diameter annular die having an 80 mil (0.192 mm) gap to form a primary which has a diameter of 5.5 inches (13.97 cm) and a wall thickness of 38 mils (0.965 mm). The primary was cooled, flattened, reheated, inflated to biaxially stretch the film and cooled. The MD draw during orientation was 4.5 and the TD inflation during biaxial orientation is 3.5. The temperature on reheating for orientation was believed to be about 80°C. The oriented tubular patch film was slit longitudinally to form a sheet about 17 inches (40.8 cm) in width. The average gauge of the film was about 2.5 mils (0.066 mm) thick. The patch film was not irradiated and is identified as Sample 2a.

A slightly thicker version of the same patch was made at an average gauge of about 3.25 mils (0.0825 mm) and is identified as Sample 2b.

A third patch was extruded and oriented under substantially the same conditions as the four component EVA-containing blends of Samples 2a and 2b. This third patch, identified as Sample 3, is the same blend as the second embodiment being a blend of:

50 wt% second polymer (mVLDPE) - Dow AFFINITY PL 1880

25 wt% first polymer (Plastomer) - Exxon EXACT 9092

21 wt % third polymer (VLDPE) - Dow ATTANE XU 61509.32

4 wt% processing aid.

Samples of the bag film and patch film were tested for shrink in accordance with the test procedure set out above. The shrink of the bag film was 48%MD and 50%TD, the shrink of the four component, EVA-containing monolayer patch film and the shrink of the three component, non EVA-containing patch film were each about 45% to 55% in both the MD and TD.

While the patch and bag films can be corona treated to adhere one to the other as described in US 5,302,402, for test purposes, patch bags were prepared by hand laminating the four component EVA-containing patches (Samples 2a and 2b) to the bag using an adhesive so that the samples were comparable to the patch bags as disclosed in US Patent 4,755,403 designated as a First Control. The First Control is described further hereinbelow. Patch bags made in this fashion with patch Samples 2a and 2b are identified as patch bag Samples 4a and 4b respectively.

The bag film and the three component, non EVA-containing patch of Sample 3 were each corona treated and laminated in accordance with the teachings of US 5,302,402. This patch bag, identified as Sample 5 represents a preferred embodiment of the present invention.

The ram puncture resistance of various samples were measured individually prior to heat shrinking. These included:

Sample 1, the oriented bag film;

Sample 2a, an oriented monolayer patch film being a blend of the same four components as the bag film heat seal layer with an average gauge of about 2.5 to 2.6 mils (0.063 to 0.066 mm);

Sample 2b, the same as 2a only having an average gauge of about 3.25 mils (0.0813 mm);

Sample 3, an oriented monolayer patch film being a blend of three components including a hexene mPlastomer without EVA;

Sample 4a, a patch bag made by hand laminating the Sample 2a oriented monolayer patch film to the bag film with an adhesive ;

Sample 4b, a patch bag made by hand laminating the Sample 2b oriented monolayer patch film to the bag film with an adhesive; and

Sample 5, a patch bag made by laminating the oriented monolayer patch of Sample 3 to the bag film with corona discharge.

5 In addition two controls were tested. The First Control identified as Sample 6, is a commercial patch bag sold by W. R. Grace. It is believed the Grace bags identified as TBG are made in accordance with the teaching of U.S. Patent No. 4,755,403. In this respect, the patch material is an oriented three layer structure formed by collapsing a two layer tubular film
10 so the inner layers adhere. The resulting structure yields a three layer film having an inner EVA layer disposed between layers comprising a blend of very low density polyethylene and EVA. In accordance with the '403 Patent, the patch is irradiated to about 7 MR. The bag film is an oriented multilayer structure believed to be four layers wherein the inner heat seal layer is a polyethylene adhered to a MA-Saran barrier layer by a tie layer which is a
15 blend of polyethylene and acrylate. The outer abuse layer is believed to be a blend of EVA and a high density polyethylene. The bag film has a nominal thickness of about 2.7 mils (0.0686 mm) thick and the patch film is about 4.5 mils (0.1168 mm) thick.

The Second Control (Sample 7) is a patch bag made in accordance with the teachings of U.S. Patent No. 5,302,402. In this respect a multilayer nonoriented blown film patch of about 0.1778 mm (7 mil) as disclosed in the '402 Patent was applied to a bag film using corona
20 discharge to adhere the film. The bag film was essentially the same three layer film as described above Sample 1. The patch was a monolayer blown film composed of a blend of 25 wt.% EVA and 75 wt.% of a mVLDPE.
25

The ram puncture resistance of the various samples were tested. The ram puncture test is more specifically described in PCT Serial No. US98/03914 filed April 17, 1998. Briefly, the ram puncture test is used to
30 determine the maximum puncture load or force, and the maximum puncture

stress of a flexible film when struck by a hemispherically shaped striker. This test provides a quantitative measure of the puncture resistance of thin plastic films. Values of this test will differ from those generated by a dynamic puncture test due to differences in striker geometry, loading rate and geometry and available energy. The dynamic puncture test employs a pyramidal striker that simulates a sharp cut bone end as opposed to the hemispherically shaped striker that is used in the ram puncture test; the dynamic puncture test passes through a pendulum arc during puncture, and the available energy is not always sufficient to puncture the film.

In conducting the ram puncture test, an approximately 5 inch (12.7 cm) diameter film sample is obtained and its thickness measured and recorded. This sample is then clamped taut but without stretching across an approximately 3 inch (7.6 cm) diameter circular opening in a fixture. The fixture is positioned so that the plane of the film is held horizontal and perpendicular to the path of a striker located above the film. The striker is a 3.95 mm diameter steel ball welded to a 5 cm long hollow steel shaft. The shaft is attached to a 50 lb full-scale Dytran™ piezoelectric load cell (available from Dytran Instruments, Inc., U.S.A.) which in turn is affixed to a crosshead assembly that forms a 3.00 kg mass. The crosshead is slidably supported on two vertical hardened steel guide shafts.

In operation, the crosshead is raised and released to propel the striker by gravity toward the clamped film at a velocity v_0 which is kinematically related to the drop height. When the striker contacts the film, the film deforms from its horizontal plane and resists the impact force through uniform multidirectional tensile stresses across the thickness of the film. The angle of deflection of the film θ is the angle defined between the film in the clamped horizontal position and the stretched film at the peak puncture load recorded during impact. This angle is always less than 90° . It is automatically measured and recorded by a data acquisition system associated with the tester. The force output of the load cell attached

to the striker is recorded at a frequency of 300 kHz beginning at roughly 1 msec prior to impact and as the striker impacts, penetrates, and punctures the film sample. Assuming that the membrane stresses are in the plane of the film (no bending stresses), and that the measured load depends upon the geometry of the striker, then the maximum stress σ may be determined by the following equation:

$$\sigma_{\max} = P_{\max} / (2\pi r t \sin \theta),$$

where P = maximum force or load; r = radius of the circle circumscribed by the circular cross-section of the hemispherical striker as it is superimposed on the plane of the film; t = the undeformed film thickness; and $\sin \theta$ is the sine of the angle between the plane of the sample holder and the fully deflected film sample at the moment of puncture.

The Total Energy "E" may be calculated by integrating the load displacement curve according to the following equation where E is the total energy; v_0 is the striker speed at the moment of impact with the film sample; P is the maximum force; t is the time to impact; g is gravitational acceleration; and m is the mass of the crosshead including the striker.

$$E = v_0 \int_0^{\infty} P dt + g \int_0^{\infty} t P dt - \frac{1}{2m} \left[\int_0^{\infty} P dt \right]^2$$

The test is repeated for a total of four samples and a mean average is reported. Accordingly, from the ram puncture test one can determine the maximum force "P" in Newtons required to puncture the film and the total

energy "E" in Joules which is absorbed by the film prior to failing. The time in msec to puncture the film also is recorded.

Sample 4 and Sample 5 represent embodiments of the invention and included the bag film having a patch film applied to one surface as noted above.

TABLE I

Sample	Avg Gauge mm	Max Force to Puncture Newtons	Time to Puncture msec	Tot Energy to Puncture Joules
1) Bag Film	0.0762	112.3	11.27	1.199
2a) Patch Film	0.066	108.4	11.06	1.125
2b) Patch Film	0.0825	154.1	13.15	1.821
3) Patch Film	0.0763	149.2	12.53	2.768
4a) Bag w/2a 2.6 mil Patch	0.182	174.9	10.22	1.653
4b) Bag w/2b 3.25 mil Patch	0.203	208.2	9.96	1.797
5) Bag w/3 Patch	0.1447	212	11.06	2.305
6) Control No.1	bag film 0.0686	70.2	8.63	0.518
	bag 0.1725	223.0	8.66	1.797
7) Control No. 2	bag film 0.0762	112.3	11.27	1.199
	patch 0.254	46.1	9.19	0.629
	bag 0.322	138.9	8.17	1.023

It should be noted that the patch of Sample 6, Control No.1, could not be separately tested because it could not be removed from the base film. Puncture values of the bag film were made by testing an area of the bag not covered by the patch.

The patch film of Sample 2b is thicker than the patch film of Sample 2a, which accounts for the increase in the maximum force to puncture, total energy to puncture and the time to puncture.

5 The patch bags made with the patch films of Samples 2a and 2b are both superior to the commercial patch bag as represented by Control No. 2 (Sample 7). Patch bag Sample 4a, which has only a 2.6 mil (0.066 mm) patch, has acceptable puncture values. Patch bag Sample 4b using a 3.25 mil (0.0825 mm) patch is comparable to the commercial bag of Control No. 1 which has a thicker patch. While the patch bag Samples 4a and 4a were
10 hand laminated using an adhesive, the patches can be adhered by corona discharge. Accordingly, a patch bag of Samples 4a and 4b wherein the patches are adhered solely by surface treatment to increase wetting tension, such as by corona discharge, are considered embodiments of the present invention.

15 The patch film of Sample 3 represents a preferred patch film embodiment of the present invention. Sample 3 demonstrates that eliminating the EVA component and using an ethylene-hexene copolymer as the mPlastomer component enhances the puncture resistance.

20 The patch bag of Sample 5, made with a 3 mil (0.076 mm) patch of the Sample 3 film, exhibited puncture resistance as good as, if not better than, the puncture resistance of the commercial bag of Control No. 1 (Sample 6) which has a much thicker patch (3 mils vs at least 4.5 mils). Also, the overall thickness of the Sample 5 bag of 0.1447mm (5.7 mils) was almost
25 20% thinner than the overall thickness of the Control No.1 bag which was 0.1725 mm (6.7 mils). As compared to Control No. 1 (Sample 6) which is an oriented three layer patch adhered to a four layer oriented film, the inventive patch bag of Sample 5 had a 28% improvement in total energy absorbed, took longer to puncture and was only slightly lower in the maximum force to puncture.

Abrasion resistance tests comparing the patch bag of the present invention with two commercial patch bags of the prior art as represented by the Control Samples 1 and 2 show that all of the patch bags tested have acceptable abrasion resistance and that abrasion resistance appear to be a function of the total thickness of the bag. Thus, Control No.2 (Sample 7) being the thickest and having the thickest patch, will have the best abrasion resistance.

Tests of patch adherence also were conducted. These tests compared the patch adherence to the bag prior to heat shrinking the bag. Patch adherence prior to heat shrinking is important in that the better the adherence the more the bag can be manipulated and handled without portions of the patch separating from the bag or falling off altogether.

Adhesion is tested by determining the peel strength of the bond between the patch and bag. This is done using a TMI Release and Adhesion Tester, Model No. 80-14-00. For purposes of the test, four samples are cut from the patch bag in the transverse direction (TD) measuring 2.54 cm (1 in.) wide. For each test, about 7.6 to 10 cm (3 to 4 inches) of the patch film is manually peeled from the base film to create two tabs. One tab is fixed and the other bent back 135° and attached to a movable carriage of the tester. When the carriage is activated, it pulls at a rate of about 7.6 meters (300 in.) per minute. The instrument measures the patch adhesion at many points as the sample is pulled and reports the average force required to pull the sample.

The Control is from a patch bag similar to Control No. 2 which is a patch bag made according to U.S. Patent No. 5,302,402 wherein the patch is a blown film. This was compared to a test piece from a patch bag according to Sample 5 of the present invention using an oriented monolayer patch including a process aid to minimize melt fracture. The results of tests run before heat shrinking are reported to Table II.

TABLE II

Sample	Peel Strength (gm)
Control No. 2	41.6
Sample 5	99.9

Table II shows that prior to heat shrinking the peel strength of the patch oriented patch according to the present invention is substantially greater than for the unoriented patch. This is surprising because the patch used for Sample 5 contained a processing aid to reduce the melt fracture of the film. No results of the peel test after heat shrinking are given. This is because after heat shrinking, the bond strength in both cases increased to the point where the patch did not peel from the base film and instead the film failed. Thus the peel strength of both films after heat shrinking was stronger than the film itself.

Thus, it should be appreciated that the present invention accomplishes its intended objects. In one embodiment, the monolayer, oriented patch composed of a blend of mVLDPE, Plastomer and VLDPE with EVA permits a significant reduction in patch thickness over the prior art while providing the patch bag with enhanced puncture resistance properties. Preferred blends for the patch film comprising blends of mVLDPE, Plastomer and VLDPE, and especially blends employing mPlastomers that are ethylene-hexene copolymers in the blend of these materials also will provide enhanced puncture resistance in a relatively thin monolayer structure. The patch film together with the bag film structure provides an improved patch bag of the present invention that has superior puncture resistance than prior art patch bags. Moreover, the superior puncture resistance is accomplished without increasing the thickness of the bag film and while significantly decreasing the patch thickness. Improved puncture resistance further is obtained without compromising the abrasion resistance. It also is significant that the adherence of the patch film to the bag is accomplished by the corona treatment of these

films to impart a wetting tension of above 38 dynes/cm even though both films are oriented.

Having described the invention in detail, what is claimed as new is:

5

"Comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A heat-shrinkable patch-bag combination suitable for use in packaging bone-in primal and subprimal cuts of meat comprising:

a) a bag formed of an oriented, multilayer heat shrinkable film from 2.25 to 3.5 mils (0.057 to 0.089 mm) thick having an inner heat sealable layer that defines an interior surface of said bag and an outer abuse layer that defines an exterior surface of said bag;

b) a patch formed of an oriented, monolayer heat shrinkable film from 2.5 to 3.5 mils (0.064 to 0.089 mm) thick having an exterior surface adhered to said bag exterior surface;

c) said bag film heat seal layer and said patch film both being formed of a polymer blend comprising

i) a first polymer which is a copolymer of ethylene and at least one $C_3 - C_{10}$ alpha-olefin, said first polymer having a density of 0.900 g/cc or less, a melting point of about 55°C to 90°C, a melt index not greater than 1.5 dg/min. and an $\overline{M}_w/\overline{M}_n$ of less than 3,

ii) a second polymer which is a copolymer of ethylene and at least $C_3 - C_{10}$ alpha-olefin, said second polymer having a density of from about 0.900 g/cc to about 0.915 g/cc, a melting point of from 90°C to 110°C, a melt index of 2 dg/min. or less and an $\overline{M}_w/\overline{M}_n$ of less than 3.5 and

iii) a third polymer which is a copolymer of ethylene and at least $C_3 - C_{10}$ alpha-olefin, said third polymer having a density of from about 0.900 g/cc to about 0.915 g/cc, a melting point of from 115°C to 130°C, a melt index of 2 dg/min. or less and an $\overline{M}_w/\overline{M}_n$ of 2 to 12; and

d) said multilayer oriented bag film and said monolayer oriented patch film each having a shrink of at least 20% in at least one direction at 90°C; and

2. A heat shrinkable patch-bag combination as in claim 1 wherein said bag exterior surface and said patch exterior surface each have a high



surface energy of at least 38 dynes/cm wetting tension as the sole means for adhering said patch to said bag.

3. A heat-shrinkable patch-bag combination as in claim 1 wherein the polymer blend of said bag film heat seal layer and said patch film includes a fourth polymer which is an ethylene-vinyl ester having a melting point of from 80°C to 105°C selected from the group consisting of ethylene-vinyl acetate, ethylene-vinyl propionate, ethylene-methyl methacrylate, ethylene-ethyl methacrylate, ethylene-ethyl acrylate and ethylene-n-butyl acrylate.

4. A heat-shrinkable patch-bag combination as in claim 3 wherein said polymer blend of said bag film heat seal layer and said patch film each comprise:

- a) 20 to 30 wt.% of said first polymer;
- b) 30 to 40 wt.% of said second polymer;
- c) 15 to 25 wt% of said third polymer; and
- d) 15 to 25 wt.% of said fourth polymer.

5. A heat-shrinkable patch-bag combination as in claim 4 wherein said fourth polymer is an ethylene-vinyl acetate having a vinyl acetate content of about 10.5%, a density of about 0.93 g/cc and a melting point of about 97°C.

6. A heat-shrinkable patch-bag combination as in claim 4 wherein said polymer blend of said bag film heat seal layer and said patch film each comprise substantially equal amounts of said first and fourth polymers and,

a) said heat seal layer comprising about 29 wt. % of said second polymer, 19 wt.% of said third polymer, 4 wt.% processing aid and 4 wt.% stabilizer and

b) said patch film comprising about 35 wt.% of said second polymer, 20 wt.% of said third polymer and 2 wt.% processing aid.



7. A heat-shrinkable patch-bag combination as in claim 6 wherein said polymer blend of said patch film includes said first polymer which is an ethylene-butene copolymer having a density of about 0.885 gm/cc, a melting point of about 68°C and a melt index of about 0.5 dg/min.

8. A heat-shrinkable patch-bag combination as in claim 1 wherein said polymer blend of said patch film comprises:

- a) 20 to 60 wt.% of said first polymer;
- b) 20 to 60 wt.% of said second polymer; and
- c) 15 to 25 wt.% of said third polymer.

9. A heat-shrinkable patch-bag combination as in claim 8 wherein said first polymer in the blend of said patch film comprises an metallocene single site catalyzed ethylene-hexene copolymer having a density of about 0.895 gm/cc, a melt index of about 0.8 dg/min, and a melting temperature of about 85°C.

10. A heat-shrinkable patch-bag combination as in claim 8 wherein said polymer blend of said patch film comprises:

- a) about 26 wt.% of said first polymer;
- b) about 50 wt.% of said second polymer;
- c) about 21 wt. % of said third polymer ; and
- d) about 4 wt.% of a processing aid.

11. A heat-shrinkable patch-bag combination as in claim 10 wherein the peel strength between a 25.4 mm (1 in.) strip of the patch film and the bag film is greater than 50 gms.

12. A heat-shrinkable patch-bag combination as in claim 10 wherein said first polymer in the blend of said patch film comprises



17. A heat-shrinkable patch-bag combination as in claim 1 wherein said bag film is a three layer film about 2.5 mils thick and said monolayer patch film is about 3.0 mils thick.

18. A heat-shrinkable patch-bag combination as in Claim 1 wherein said bag film and said patch film are each not more than about 3 mils (0.076 mm) thick.

19. A heat-shrinkable patch-bag combination as in Claim 1 wherein said first copolymer is a C_2/C_6 copolymer having a density of about 0.895 g/cm^3 and a melting point of about 85°C .

20. An oriented heat shrinkable monolayer patch bag film comprising:

a) 20 to 60 wt.% of a metallocene catalyzed first polymer which is a copolymer of ethylene and hexene having a density below 0.900 gm/cc , a melt index of less than 1 dg/min. and a melting temperature below 90°C ;

b) 20 to 60 wt.% of a metallocene catalyzed second polymer which is a copolymer of ethylene and octene having a density of 0.900 to 0.905 gm/cc , a melt index of about 1 dg/min. and a melting point of about 100°C ; and

c) 15 to 25 wt.% of a third polymer which is a copolymer of ethylene and octene having a density greater than the density of said second polymer and less than about 0.915 gm/cc , a melt index of about 1 dg/min. and a melting point of 115 to 130°C .

DATED this 28th day of September, 1999

VISKASE CORPORATION



WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

Abstract

5

A patch bag for packaging bone-in meat cuts having a thin-walled heat shrinkable monolayer patch film adhered to a thin-walled heat shrinkable multilayer bag film wherein the adherence of one to the other is solely due to the surface energy of the films, the patch film and the heat seal layer of the bag film both including blend of a first polyethylene having a density below 0.900 g/cc and a second polyethylene having a density of 0.900 to 0.915 g/cc and a melting point of 90 to 110°C and a third polyethylene having a density of 0.0900 to 0.915 and a melting point of 115 to 130°C with EVA being a third component of the bag film heat seal layer and an optional component of the patch film.

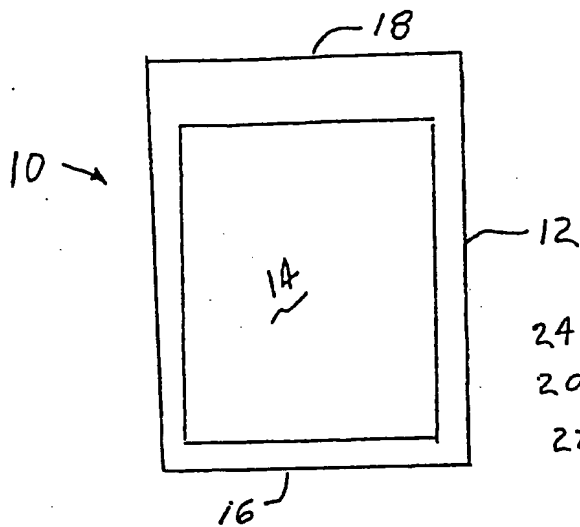


FIG 1

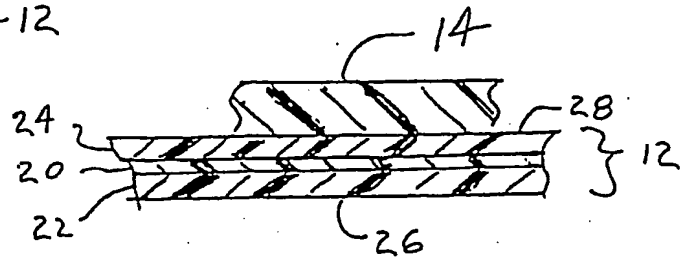


FIG 2

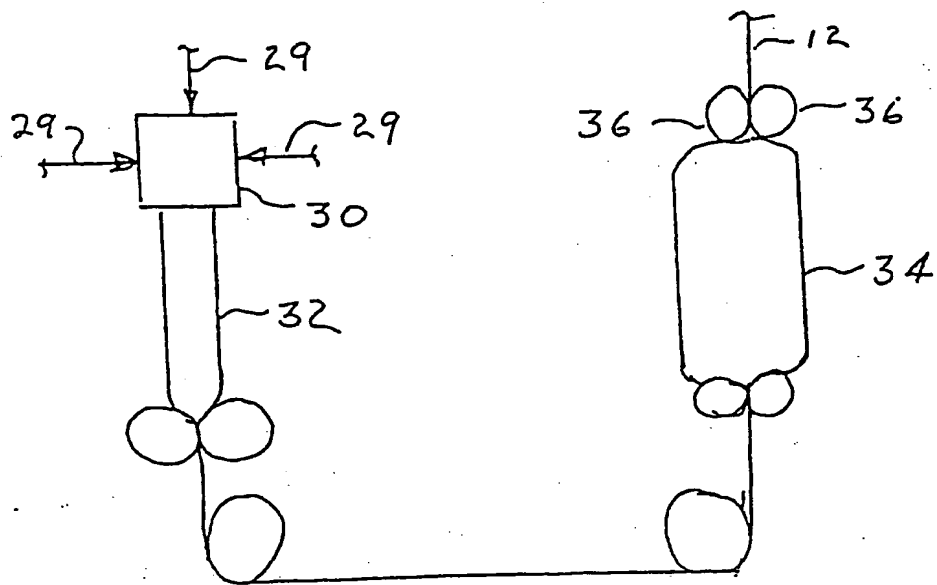


FIG 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.